


LUXURIOUS EXPERIENCE

ULTRA-MODERN QUALITY



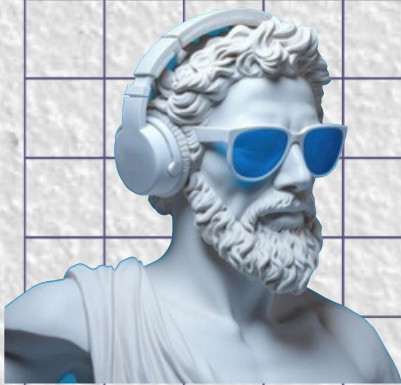

The Ultimate
New Collection



SPARKLE

YOUR INTERIORS



Indulge in timeless elegance with our Multi Charged Vitrified Tiles, crafted using advanced Italian technology. These luxurious tiles boast rich, deep colors that permeate throughout, thanks to a unique double pressing technique. This ensures unparalleled color resistance, even in high-traffic areas.

IS 15622: 2017



CM/L-7900134112

GALAXY
SERIES





POLISHED

SHED

ELEGANCE TILES



Long Durability



Impact Resistance



Frost Resistance



Frost Resistance



Low Water Absorption



Dimensional Stability



Hygienic Surface



Hygienic Surface



Easy Installation



Easy Installation



Thermal Shock Resistance



Thermal Shock Resistance

Technical Spaces



Residential



Commercial Building



Hotel, Café & Restaurant



Gymnasium



Super Market & Mall



School & College



Spa & Wellness Centres



Hospital



Airport



Hall & Corridor




Religious Place





Light Series | 600x600mm | Glossy

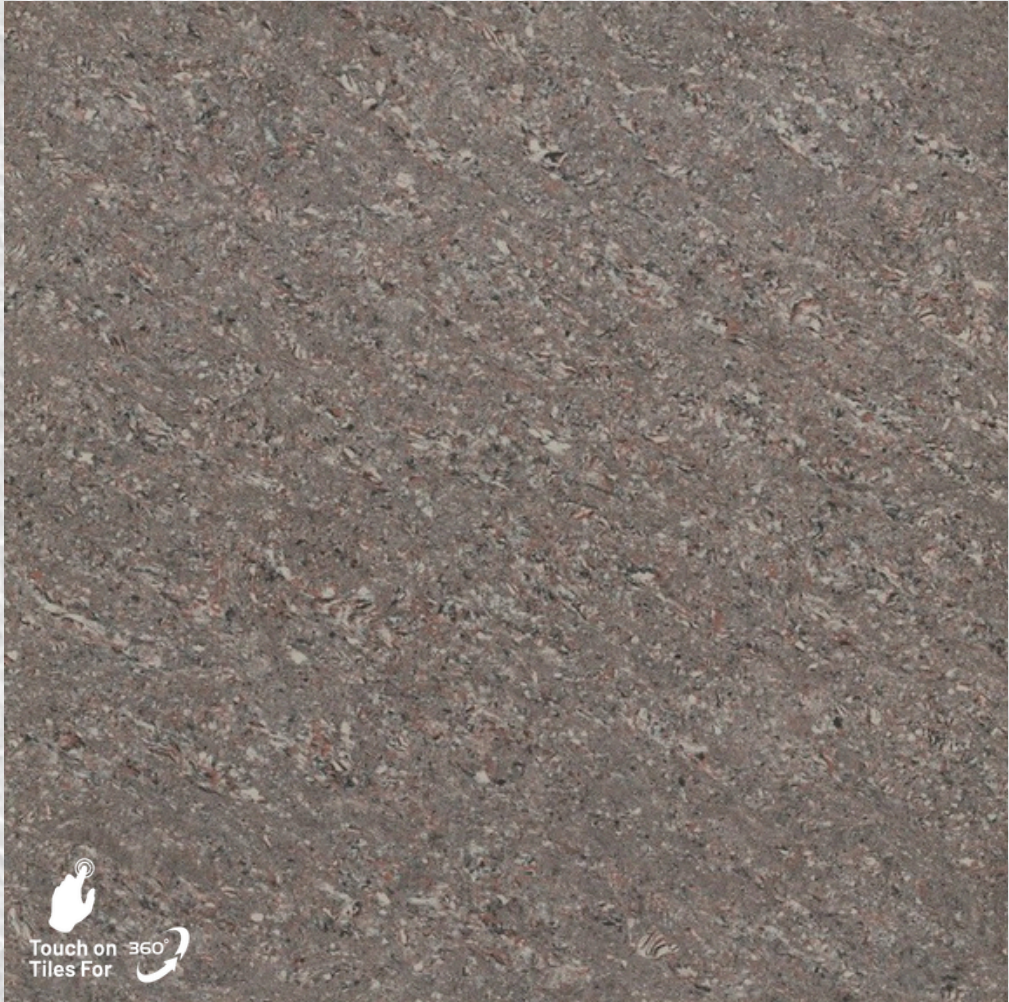





Light Series | 600x600mm | Glossy





Galaxy **White**

GALAXY
SERIES



Galaxy Light Series

Light Series | 600x600mm | Glossy






Galaxy **Ice White**

GALAXY
SERIES



Galaxy

Light Series | 600x600mm | Glossy

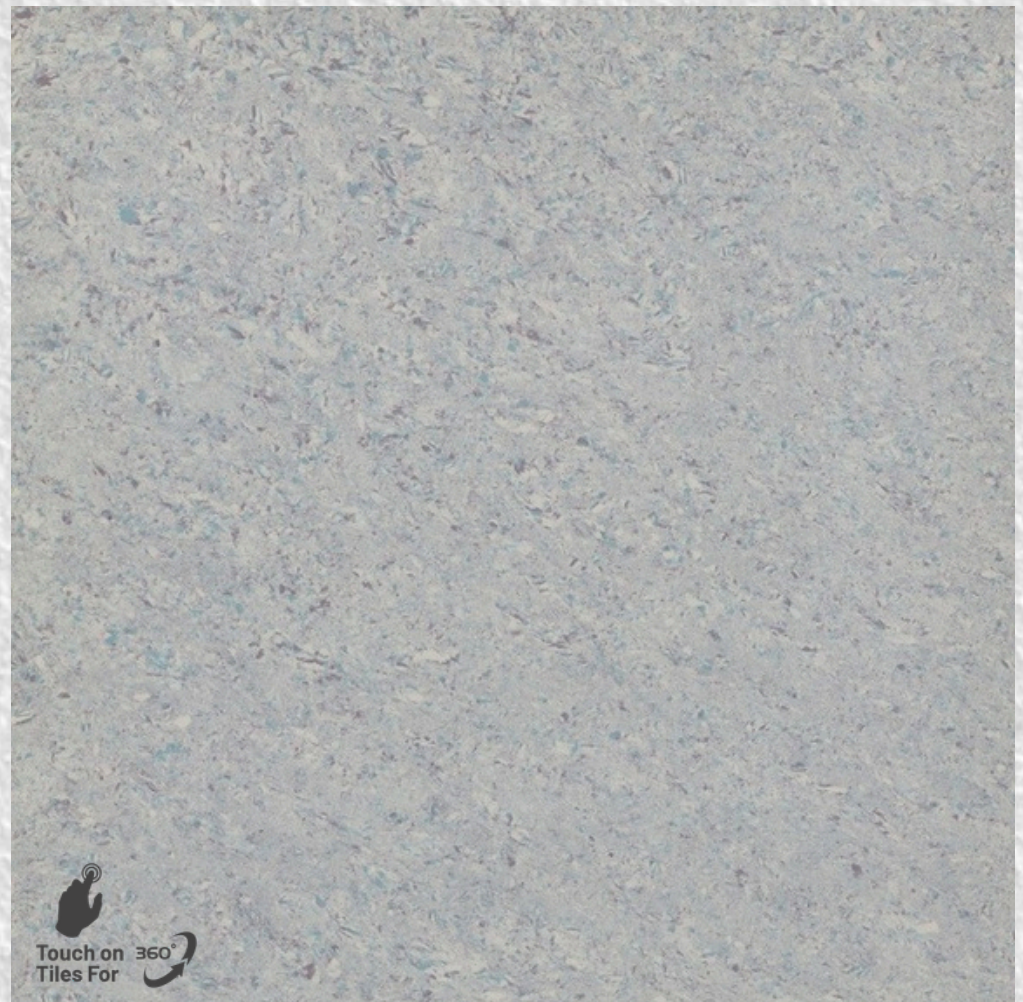



Galaxy **Lavender**

GALAXY



Galaxy Light Series

Light Series | 600x600mm | Glossy





Galaxy Ice Slate

GALAXY
SERIES



Light Series | 600x600mm | Glossy







Light Series | 600x600mm | Glossy







Galaxy Light Series

Light Series | 600x600mm | Glossy





Galaxy Ice Fossil

GALAXY
SERIES



Light Series | 600x600mm | Glossy





Galaxy Snow

GALAXY
SERIES



Light Series | 600x600mm | Glossy







Galaxy Light Blue

Light Series | 600x600mm | Glossy





Galaxy Ice Blue

GALAXY
SERIES



Light Series | 600x600mm | Glossy





Galaxy Copper

GALAXY
SERIES



Light Series | 600x600mm | Glossy








Galaxy

Light Series | 600x600mm | Glossy

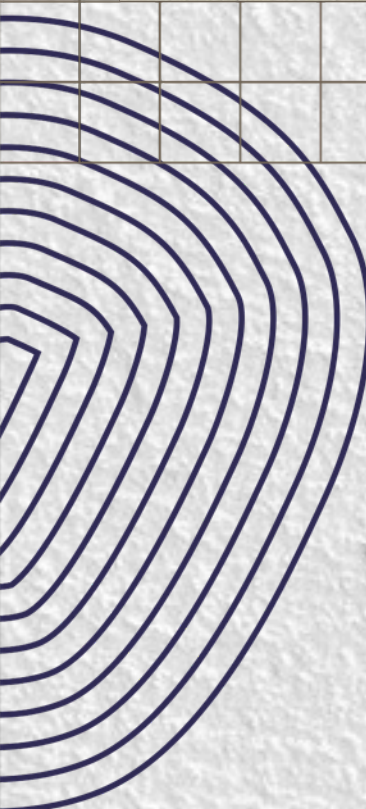





Light Series | 600x600mm | Glossy







Light Series | 600x600mm | Glossy








Galaxy Series

Light Series | 600x600mm | Glossy

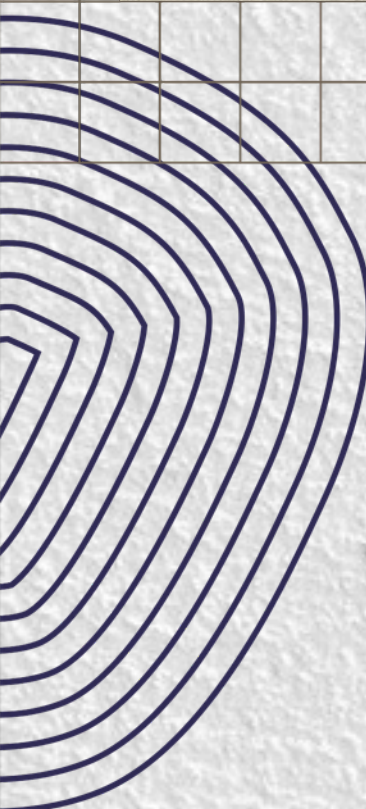





Galaxy

Light Series | 600x600mm | Glossy







Light Series | 600x600mm | Glossy







Light Series | 600x600mm | Glossy







Light Series | 600x600mm | Glossy







Light Series | 600x600mm | Glossy







Light Series | 600x600mm | Glossy







Light Series | 600x600mm | Glossy





Galaxy **Pink**

GALAXY
SERIES



Galaxy Series

Light Series | 600x600mm | Glossy





Galaxy Pearl

GALAXY
SERIES



Light Series | 600x600mm | Glossy







Light Series | 600x600mm | Glossy







Light Series | 600x600mm | Glossy







Light Series | 600x600mm | Glossy





Galaxy Sand

GALAXY
SERIES



Light Series | 600x600mm | Glossy








Galaxy Series

Light Series | 600x600mm | Glossy

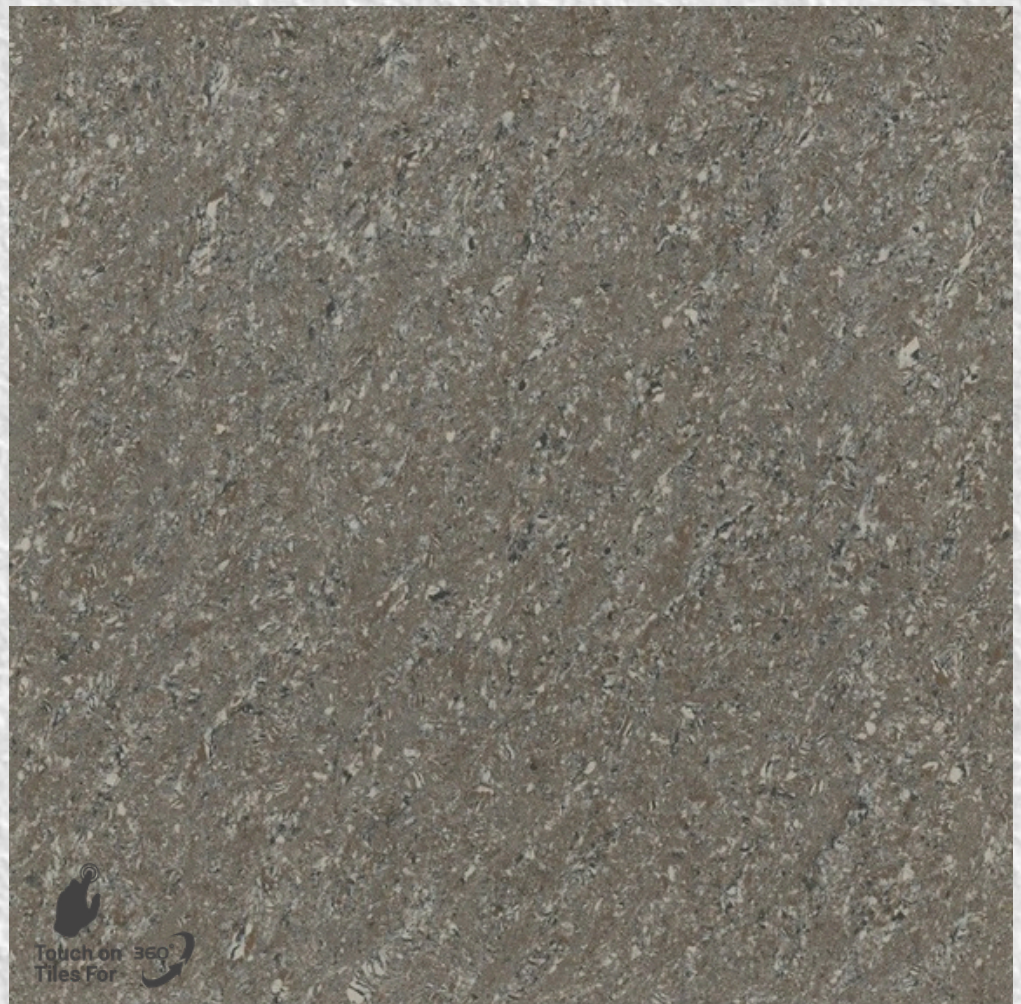



Galaxy **Smoke**

GALAXY
SERIES



Dark Series | 600x600mm | Glossy








Galaxy

Dark Series | 600x600mm | Glossy

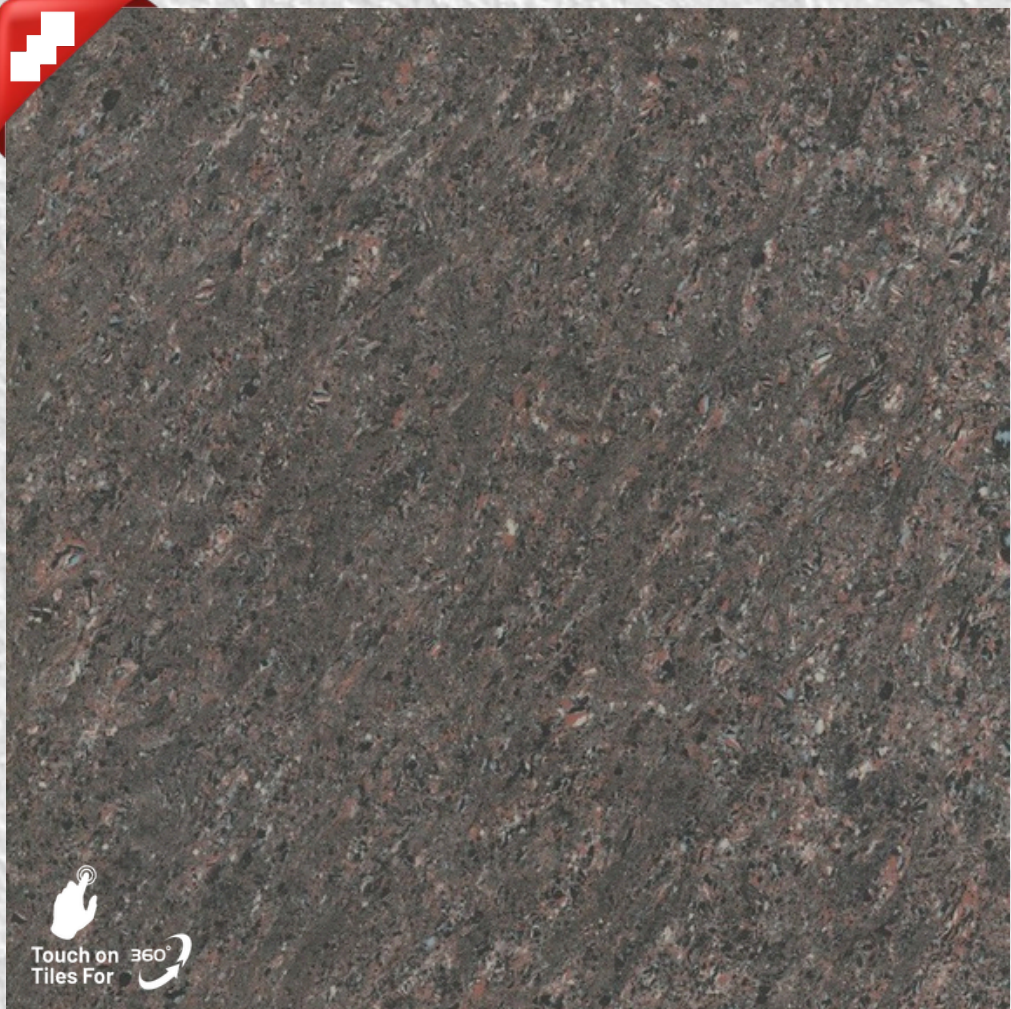





Galaxy

Dark Series | 600x600mm | Glossy







Dark Series | 600x600mm | Glossy







Dark Series | 600x600mm | Glossy





Galaxy **Black**

GALAXY
SERIES



Super **White**

600x600mm | Glossy





Super **White**

TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO-13006/ En14411 GROUP Bla	MEAN VALUE OF RICH VITRIFIED TILES	TEST METHOD
Deviation In Length & Width	±0.50%	±0.20%	ISO - 10545 - 2
Deviation In Thickness	+5.00%	±5.00%	ISO - 10545 - 2
Straightness Of Sides	±0.50%	±0.20%	ISO - 10545 - 2
Rectangularity	±0.50%	±0.30%	ISO - 10545 - 2
Surface Flatness	±0.50%	±0.10%	ISO - 10545 - 2
Color Differences	Unaltered	No Change	ISO - 10545 - 16
Glossiness	As Per Manufacturer	Min. 88%	Glossometer
Water Absorption	<0.50%	<0.10%	ISO - 10545 - 3
Apparent Density	>2.00 gm/cc	>2.28 gm/cc	ISO - 10545 - 3
Flexural Modulus Of Rupture	Min 35N/mm ²	Min 40N/mm ²	ISO - 10545 - 4
Flexural Breaking Strength	Min 1300 N	Min 1400 N	ISO - 10545 - 4
Impact Resistance	As Per Manufacturer	Min 0.55	ISO - 10545 - 5
Deep Abrasion Resistance	Max 175mm ³	Max 140mm ³	ISO - 10545 - 6
Moh's Hardness	Min 6	6 ⁺	IS-13630-13
Frost Resistance	No Damage	Frost Proof	ISO - 10545 - 12
Thermal Shock Resistance	No Damage	No Damage	ISO - 10545 - 9
Moisture Expansion	Nil	Nil	ISO - 10545 - 10
Thermal Expansion	Max 9.0 X 10 ⁻⁶	Max 6.5 X 10 ⁻⁶	ISO - 10545 - 8
Chemical Resistance	No Damage	No Damage	ISO - 10545 - 13
Stain Resistance	Resistant	Resistant	ISO - 10545 - 14
Slip Resistance [Friction Co Efficient]	≥0.40	≥0.40	ISO - 10545 - 17

PACKING DETAILS

Size	Normal Thickness	No. of Tiles/Box	Coverage Area	Wt. of Box
600x600mm	7.5mm	4 pcs	15.50 sq. Ft. / 1.44 sq. Mt.	23.5 Kgs (aprox)

DISCLAIMER: Rich Vitrified Pvt Ltd reserves the right to delete and amend either totally or partially, any of the colors, shapes, size, references and other technical specification contained in this catalogue at anytime. The colors shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of size, colors, references should be verified for typographical errors. All Complaints need to be reported within 10 days of purchase. Always Follow instructions to avoid complaint due to bad masonry.